


18120 Mod. Cross Elbow Assembly Aluminum Magnesium 1-1/2" IPS (1.94" ID)

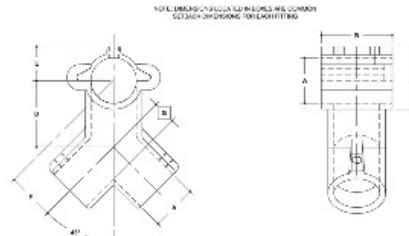

#225 Modular Cross Elbow Assembly

IPS O.D.	LINK-UP RAILS								HELIX-UP RAILS							
	A	B	C	D	E	F	G	H	A	B	C	D	E	F	G	
2"	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1 1/2"	151	327	234	174	174	232	32	-	151	25	25	25	25	25	25	25
1 1/4"	138	312	226	165	165	221	25	-	138	25	25	25	25	25	25	25
1"	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3/4"	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

[Click here for chart](#)

BUYRAILINGS
ARCHITECTURAL AND INDUSTRIAL RAILINGS

2 1/2" IPS
2 1/2" Helix-UP
Schedule 40 2.319" I.D., 0.188" Wall
Schedule 80 1.937" I.D., 0.218" Wall

1 1/2" IPS
1 1/2" Helix-UP
Schedule 40 1.617" I.D., 0.188" Wall
Schedule 80 1.235" I.D., 0.227" Wall

1 1/4" IPS
1 1/4" Helix-UP
Schedule 40 1.497" I.D., 0.188" Wall
Schedule 80 1.115" I.D., 0.217" Wall

1" IPS
1" Helix-UP
Schedule 40 1.317" I.D., 0.188" Wall
Schedule 80 0.935" I.D., 0.217" Wall

3/4" IPS
3/4" Helix-UP
Schedule 40 1.137" I.D., 0.188" Wall
Schedule 80 0.755" I.D., 0.217" Wall