


17120 Mod. Cross Elbow Assembly Aluminum Magnesium 1-1/4" IPS (1.72" ID)

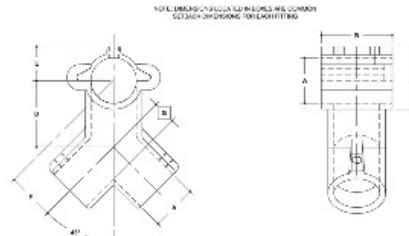

#225 Modular Cross Elbow Assembly

IPS O.D.	LINK-UP RAILS								HELIX-UP RAILS								
	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
2"	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1 1/2"	151	327	234	174	174	232	32	-	-	-	-	-	-	-	-	-	-
1 1/4"	138	312	226	165	165	221	26	-	-	-	-	-	-	-	-	-	-
1"	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3/4"	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

[Click here for chart](#)

BUYRAILINGS
ARCHITECTURAL AND INDUSTRIAL RAILINGS

2 1/4" IPS
2 1/4" IPS
Schedule 40 2 3/8" O.D., 0.188" Wall
Schedule 40 1 3/8" I.D., 0.188" Wall

1 1/2" IPS
1 1/2" IPS
Schedule 40 1 5/8" O.D., 0.188" Wall
Schedule 40 1 1/8" I.D., 0.188" Wall

1 1/4" IPS
1 1/4" IPS
Schedule 40 1 3/4" O.D., 0.188" Wall
Schedule 40 1 1/4" I.D., 0.188" Wall

1" IPS
1" IPS
Schedule 40 1 1/4" O.D., 0.188" Wall
Schedule 40 1" I.D., 0.188" Wall

3/4" IPS
3/4" IPS
Schedule 40 1" O.D., 0.188" Wall
Schedule 40 3/4" I.D., 0.188" Wall