


07240 Adj. Elbow or Tee-E Assembly Aluminum Magnesium 1-1/4" IPS (1.72" ID)

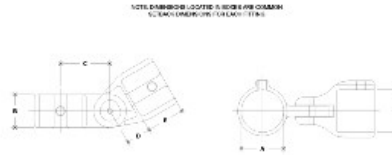

#17E Adjustable Elbow or Tee Assembly

PIPE SIZE	EAGLE/ALUM/TEE/ASSEMBLY							NET WEIGHT (LBS)						
	A	B	C	D	E	F	G	A	B	C	D	E	F	G
1 1/4"	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
1 1/2"	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11

[Click here for chart](#)

BUYRAILINGS
ARCHITECTURAL AND INDUSTRIAL RAILINGS

2 1/2" IPS
2.375" Min. O.D.
Schedule 40 2.381" I.D. 0.146" Wall
Schedule 80 1.937" I.D. 0.218" Wall

1 1/2" IPS
1.625" Min. O.D.
Schedule 40 1.631" I.D. 0.146" Wall
Schedule 80 1.187" I.D. 0.257" Wall

1 1/4" IPS
1.562" Min. O.D.
Schedule 40 1.568" I.D. 0.146" Wall
Schedule 80 1.124" I.D. 0.181" Wall

1" IPS
1.315" Min. O.D.
Schedule 40 1.321" I.D. 0.146" Wall
Schedule 80 0.877" I.D. 0.179" Wall

3/4" IPS
1.062" Min. O.D.
Schedule 40 1.068" I.D. 0.146" Wall
Schedule 80 0.624" I.D. 0.154" Wall