


**38840 Mend-A-Rail Side Outlet Elb/Tee Aluminum Magnesium 1-1/2" IPS (1.94" ID)**

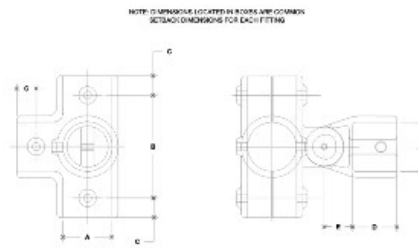

**#2500 Mend-A-Rail Side Outlet Elbow or Tee**

PIPE SIZE	ENGLISH UNITS (INCHES)						METRIC UNITS (MM)						
	A	B	G	D	E	F	A	B	G	D	E	F	G
2"													
2 1/2"	1.54	1.75	25	1.26	1.13								
3"													
3 1/2"													
4"													

[Click here for chart](#)

**BUYRAILINGS**  
ARCHITECTURAL AND INDUSTRIAL RAILINGS

2" IPS  
2.315" Outside O.D.  
Schedule 40 2.267" I.D. 0.154" Wall  
Schedule 80 1.987" I.D. 0.218" Wall

1 1/2" IPS  
1.915" Outside O.D.  
Schedule 40 1.817" I.D. 0.149" Wall  
Schedule 80 1.587" I.D. 0.200" Wall

1 1/4" IPS  
1.860" Outside O.D.  
Schedule 40 1.762" I.D. 0.149" Wall  
Schedule 80 1.532" I.D. 0.191" Wall

1" IPS  
1.315" Outside O.D.  
Schedule 40 1.267" I.D. 0.154" Wall  
Schedule 80 1.087" I.D. 0.118" Wall

3/4" IPS  
1.060" Outside O.D.  
Schedule 40 1.012" I.D. 0.119" Wall  
Schedule 80 0.842" I.D. 0.154" Wall