


07500 Nu-Rail Adj. Cross Aluminum Magnesium 1-1/4" IPS (1.72" ID)



NOTE: DIMENSIONS LOCATED BY DASHES ARE COMMON
DIMENSIONS (DASHES) FOR EACH FITTING

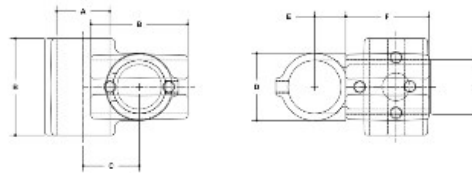

#30 Nu-Rail Adjustable Cross

SCALE: 1/4"=1"

PIPE SIZE	ENGLISH UNITS (INCHES)							PIPE SIZE	METRIC UNITS (MM)						
	A	B	C	D	E	F	G		A	B	C	D	E	F	G
2"	2.42	4.20	2.02	2.47	1.26	2.11	—	61	106	51	62	32	54	—	
1.5"	1.52	2.59	1.02	1.44	1.13	1.70	—	39	66	26	36	29	43	—	
1.0"	1.04	1.90	.76	1.16	1.00	1.29	—	26	48	19	29	25	33	—	
3/4"	1.21	2.20	1.41	1.19	.83	2.19	—	31	44	36	30	21	55	—	
3/8"	1.67	3.20	1.19	1.15	.88	2.03	—	42	51	30	29	22	51	—	

- Quick and easy way to assemble structural pipe systems • Galvanized malleable iron
- Reduce labor costs by 70% • 100% reusable • No welding or threading • No drilling or bolting

Strong, malleable iron, slip-on pipe fittings with from one to five case-hardened set screws per fitting – depending on the number of pipes to be joined at one joint.

For slip-on aluminum fittings. These fittings can support an axial load of 2000 lbs per set screw with the set screw tightened to a torque of 29 lbs/ft. This is normally obtained when the screw is fully tightened using a ratchet wrench.

30-8 is adjustable between 30° and 45° from the horizontal.