


KK68-6 Wall Flange Galvanized Steel 1" IPS (1.38" ID)

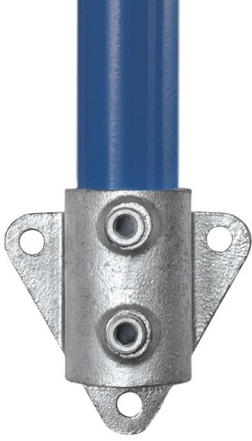

Side fixing for guardrailing and balustrading to walls, parapets, steps and ramps. The upright cannot drop through the socket. Ø indicates diameter of fixing holes. If the upright is required to pass through the fitting by machining out the base stop, the bottom fixing hole will be unusable.

Part	Weight	A	D	E	F	G	H	J	K	diameter of fixing holes
68-6	1.36 lbs.	6	2.48 in.	1.17 in.	3.03 in.	2.8 in.	0.94 in.	3.78 in.	4.06 in.	0.43 in.
68-7	1.76 lbs.	7	2.83 in.	2.17 in.	3.27 in.	3.27 in.	1.1 in.	4.25 in.	4.29 in.	0.43 in.
68-8	2.09 lbs.	8	3.07 in.	2.36 in.	3.5 in.	3.39 in.	1.22 in.	4.37 in.	4.57 in.	0.43 in.